


* All Dimensions in Inches

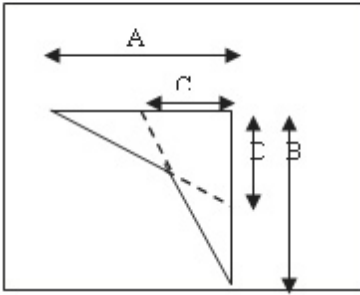

Halfround Framing Specifications

Opening Model #	Rough Opening Width (Min - Max)	Finished Jamb Width	Outside Finished Width					Dimensions of Rough-In Blocks			
			4" Casing No Capitals	4" Casing w/ Backband or Capitals	5" Casing No Capitals	5" Casing w/ Backband or Capitals	#625 Pilaster	"A"	"B"	"C"	"D"
30	30 - 31 1/2	27	34 3/8	37 3/8	36 3/8	39 3/8	41 7/8	11	11	6	6
32	32 - 33 1/2	29	37 3/8	40 3/8	39 3/8	42 3/8	44 7/8	12	12	7	7
34	34 - 35 1/2	31	39 3/8	42 3/8	41 3/8	44 3/8	46 7/8	13	13	7	7
36	36 - 37 1/2	33	41 3/8	44 3/8	43 3/8	46 3/8	48 7/8	14	14	7	7
38	38 - 39 1/2	35	43 3/8	46 3/8	45 3/8	48 3/8	50 7/8	15	15	7	7
40	40 - 41 1/2	37	45 3/8	48 3/8	47 3/8	50 3/8	52 7/8	16	16	7	7
42	42 - 43 1/2	39	47 3/8	50 3/8	49 3/8	52 3/8	54 7/8	16	16	8	8
44	44 - 45 1/2	41	49 3/8	52 3/8	51 3/8	54 3/8	56 7/8	17	17	8	8
46	46 - 47 1/2	43	51 3/8	54 3/8	53 3/8	56 3/8	58 7/8	18	18	8	8
48	48 - 49 1/2	45	53 3/8	56 3/8	55 3/8	58 3/8	60 7/8	18	18	9	9
50	50 - 51 1/2	47	55 3/8	58 3/8	57 3/8	60 3/8	62 7/8	20	20	9	9
54	54 - 55 1/2	51	59 3/8	62 3/8	61 3/8	64 3/8	66 7/8	21	21	10	10
58	58 - 59 1/2	55	63 3/8	66 3/8	65 3/8	68 3/8	70 7/8	22	22	12	12
62	62 - 63 1/2	59	67 3/8	70 3/8	69 3/8	72 3/8	74 7/8	23	23	13	13
66	66 - 67 1/2	63	71 3/8	74 3/8	73 3/8	76 3/8	78 7/8	25	25	13	13
70	70 - 71 1/2	67	75 3/8	78 3/8	77 3/8	80 3/8	82 7/8	25	25	16	16
72	72 - 73 1/2	69	77 3/8	80 3/8	79 3/8	82 3/8	84 7/8	25	25	17	17
74	74 - 75 1/2	71	79 3/8	82 3/8	81 3/8	84 3/8	86 7/8	26	26	17	17